

SINCE  
1947

# TOUGH TILLAGE TOOLS

SINCE  
1947



IMPLEMENT  
PRICE LIST  
RELEASED  
January 1, 2025

## TABLE OF CONTENTS

### OFFSETS

<u>MODEL NO.</u>		<u>PAGE NO.</u>
<b>Horsepower Rating Chart &amp; Basic Information 2</b>		
LOF	3-Point	3
D41		4
F41		5
J41		6
F42		7
J42		8
J42 Fold		9
J43		10
J44		11
G2		12

### DOUBLE OFFSET TANDEM

LTF 100 (6' to 12') and Options	3-Point	13
F15B (16'6" to 24') and Options		14
F15 (24', 27', 30') and Options		15
F15 (34'6", 39') and Options		16
F17 (9'3" to 16'6") and Options		17

### WATER MANAGEMENT

<u>MODEL NO.</u>		<u>PAGE NO.</u>
Terracing Plow	3-Point	18
Hydraulic Levee Plow	3-Point	19
Manual Levee Plow	3-Point	20
AMCO Rotary Ditcher	3-Point	21
Dominator Ditcher (NEW!)	3-Point	22
Border Plow	3-Point	31
Pivot/Tile Plow	3-Point	32

### HIPPER and TOOL BAR EQUIPMENT

Bedding Hipper(Rigid)(1-1/2" axle)	3-Point	23
Hydraulic Fold Hipper (1-1/2" axle)	3-Point	24
Dual HD Hydraulic Tool Bars	3-Point	25
Bedding Hipper Assemblies		26
Miscellaneous Tool Bar and Hipper Equipment		27
Bedding Hipper U-bolt and Wear Guard Bundles		28
Water Furrow Plow	3-Point	30

### GRADER BLADE

Z-Blade (NEW!)	3-Point	29
----------------	---------	----

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)

**This page has been left blank**

# Contact Us

## Sales Team

Our sales team is committed to working with each customer to determine the best tillage or water management tool for your needs and operation. Please contact us to learn more about AMCO products today!



**CHARLIE LANE**

Marketing Manager

Office: 800-748-9022, ext. 201

Cell: 601-431-3738



[clane@amcomfg.com](mailto:clane@amcomfg.com)



**BILLY ELMAN**

Marketing & Sales Representative

Office: 800-748-9022, ext. 214

Cell: 601-559-0555



[belman@amcomfg.com](mailto:belman@amcomfg.com)

## Contact Us

### Mailing Address:

AMCO Manufacturing, Inc.  
PO Box 1107  
Yazoo City, MS 39194

### Shipping Address & Hours:

AMCO Manufacturing, Inc.  
800 S. Industrial Parkway  
Yazoo City, MS 39194

Monday – Friday:  
7:30am to 3:00pm (Central Time)

### Business Hours:

Monday – Friday  
7:30am to 4:30pm (Central Time)

### Telephone Numbers:

800-748-9022  
662-746-4464

### Fax Number:

662-746-6825

### Email:

[Sales@amcomfg.com](mailto:Sales@amcomfg.com)

[Parts@amcomfg.com](mailto:Parts@amcomfg.com)

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**




## AMCO Manufacturing Company

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)

AMCO's Letter Chart For Blade Spacing	
<b>D</b>	Stands for 9" spacing with 1-1/8" square axle
<b>F</b>	Stands for 9" spacing with 1-1/2" square axle
<b>J</b>	Stands for 10.5" spacing with 1-1/2" square axle
<b>G</b>	Stands for 12.5" spacing with 2-1/4" round axle



## Estimated Horsepower Rating Chart

Estimated Horsepower Rating Chart									
Model #	30-50	50-100	100-150	150-200	200-250	250-300	300-350	350-400	400+
Ditcher 540		♦							
Ditcher 1000		♦	♦						
LOF		♦							
D41	♦	♦							
F41		♦	♦						
J41		♦	♦						
F42			♦	♦	♦	♦			
J42			♦	♦	♦	♦			
J43			♦	♦	♦	♦			
J44			♦	♦	♦	♦			
G2				♦	♦	♦	♦	♦	♦
LTF 100	♦	♦	♦						
F15B				♦	♦	♦			
F15					♦	♦	♦	♦	
F17		♦	♦	♦					
TJ3				♦	♦	♦			
LF6 & LJ6			♦	♦	♦				
MLF6 & MLJ6			♦	♦	♦				
Z-Blade		♦	♦						
Bedding Hipper			♦	♦	♦	♦			

\*\*Actual HP requirements may change due to soil types, soil density, high residue, topography, weight added to harrow\*\*

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA


(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# LIFT OFFSET HARROWS



## MODEL "LOF"

9" Spacing  
(F) series

### STANDARD SPECIFICATIONS (Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" square, high carbon cold rolled steel	<b>GANG ANGLE:</b>	14° to 18° front to rear
<b>BLADES:</b>	24" x 1/4"(6mm) Cut out with right front and right rear blades stepped down 2" less	<b>HITCH:</b>	3-Point – Fits Cat II or Cat III
<b>FINISH:</b>	Powder coated	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>SPACING:</b>	9 Inches	<b>BEARING RISERS:</b>	Standard cast gang risers
<b>SCRAPERS:</b>	HD high carbon steel blades on 1/2" x 1-1/2" shanks, mounted on 2" x 2" x 3/8" angle iron bars	<b>GANG TUBING:</b>	3" x 5" x 1/4" Wall rectangular tubing on gangs
		<b>MAIN FRAME TUBING:</b>	3" x 4" x 1/4" Wall rectangular tubing on main frame

### SPRING LOADED LEVELING SYSTEM

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required	Approximate Weight lbs (kg)	Factory List Price
LOF-2024	7'6"	20	8	70	2152 LBS (976)	\$11,290.00
LOF-2224	8'3"	22	8	80	2272 LBS (1030)	12,130.00
LOF-2424	9'0"	24	8	90	2392 LBS (1084)	12,345.00
<b>OPTIONAL EQUIPMENT</b>						
AB-01-0003	24" x 1/4" (6mm) Plain blades in lieu of standard				Add 2.0 (0.9)ea.	-0-
	22" x 1/4"(6mm) Plain blades in lieu of standard				Ded 7.9 (3.6)ea.	Ded ea. 13.00
	22" x 1/4"(6mm) Cut out blades in lieu of standard				Ded 6.0 (2.7)ea.	Ded ea. 13.00
	Feathering Blade with scraper for rear gang				Add 28 (13)	Add 320.00
	Shock Absorber bearing riser with 1-1/4" x 2" spring steel shank – Add per bearing				Add 21 (9.5) ea	Add ea. 205.00


AMCO PL Effective January 1, 2025 F.O.B. Yazoo City, Mississippi  
**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**  
 P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
 (800)748-9022 (662)746-4464 Fax (662)746-6825  
[www.amcomfg.com](http://www.amcomfg.com)  
[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# WHEEL OFFSET HARROWS



## MODEL "D41"

9" Spacing  
(F) series

### STANDARD SPECIFICATIONS (Metrics in Parentheses)

<b>AXLES:</b>	1-1/8" square, high carbon cold finished steel	<b>GANG ANGLE:</b>	17° to 23° front to rear
<b>BLADES:</b>	22" x 3/16" Plain with diminishing leveling blades	<b>TONGUE:</b>	Adjustable
<b>WHEELS:</b>	Two (2) 15" x 6" - 6 hole hub with 9.5Lx15" Tires, 8 ply	<b>BEARINGS:</b>	Heavy duty, 1-1/8" round bore greasable triple ball type,
<b>SPACING:</b>	9 Inches	<b>2 Year Warranty On Bearings!</b>	
<b>SCRAPERS:</b>	High carbon steel blades on 1/2" x 1-1/2" shanks, mounted on 2" x 2" angle iron bars	<b>BEARING RISERS:</b>	Fabricated Steel
<b>FINISH:</b>	Powder coated	<b>TRANSPORT RISERS:</b>	Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
		<b>TRANSPORT WIDTH:</b>	Cutting width plus 6"
		<b>HYDRAULIC CYLINDERS:</b>	3" x 8" Cylinder Includes hose bundle to tractor and hose holder

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
D41-1622	6'0"	16	6	34-54 (25-40)	1867 (846)	\$11,130.00
D41-1822	6'9"	18	6	41-61 (30-45)	1952 (885)	11,595.00
D41-2022	7'6"	20	6	47-68 (35-50)	2102 (953)	12,010.00
D41-2222	8'3"	22	6	61-81 (45-60)	2252 (1021)	12,430.00
D41-2422	9'0"	24	8	74-95 (55-70)	2402 (1089)	13,360.00
<b>OPTIONAL EQUIPMENT</b>						
AB-01-0006	Feathering Blade				Add 28 (12.7)ea.	Add 265.00
	18" x 3/16" Plain blades in lieu of standard				Ded 7.2 (3.2)ea.	Ded 14.00 ea
	18" x 3/16" Cutout blades in lieu of standard				Ded 5.6 (2.54)ea.	Ded 14.00 ea
	20" x 3/16" Plain blades in lieu of standard				Ded 2 (0.9)ea.	Ded 13.00 ea
	20" x 3/16" Cutout blades in lieu of standard				Ded 2.4 (1.08)ea.	Ded 13.00 ea
	22" x 3/16" Cutout blades in lieu of standard					

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**


P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# WHEEL OFFSET HARROWS



## MODEL "F41"

9" Spacing  
(F) series

General Purpose  
STANDARD SPECIFICATIONS  
(Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" square, high carbon cold rolled steel	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>BLADES:</b>	22" x 1/4"(6mm) Cutout with back up disc behind right front blade	<b>TRANSPORT FEATURES:</b>	Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
<b>SCRAPERS:</b>	HD high carbon steel blades on 1/2" x 1-1/2" shanks, mounted on 2" x 2" x 3/8" angle iron bars	<b>WHEELS:</b>	Two 15" x 6" - 6 bolt hubs w/ 9.5Lx15" Tires, 8ply
<b>TONGUE:</b>	Adjustable with tongue jack	<b>WRENCHES:</b>	One for gang bolts
<b>HYDRAULIC CYLINDERS:</b>	4" x 8" Hyd Cylinder(3000 PSI). Includes hose bundle to tractor	<b>WEIGHT:</b>	108 to 134 lbs. (49 to 61kg) per blade 288 to 357 lbs. (429 to 531kg) per foot
<b>BEARING RISERS:</b>	Fabricated steel	<b>GANG ANGLE:</b>	17° to 23° front and rear
<b>SPACING:</b>	9 Inches (229mm)	<b>TRANSPORT WIDTH:</b>	Cutting width plus 6" (2mm) plus additional 10" (0.3m) with feathering blades
<b>FINISH:</b>	Powder coated		

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
F41-1822	6'9" (2.06m)	18	6	68-88 (50-65)	2428 (1101)	\$ 15,835.00
F41-2022	7'6" (2.29m)	20	6	75-95 (55-70)	2568 (1164)	16,445.00
F41-2222	8'3" (2.51m)	22	8	81-101 (60-75)	2801 (1270)	18,085.00
F41-2422	9'0" (2.74m)	24	8	88-108 (65-80)	2922 (1332)	18,525.00
F41-2622	9'9" (3.00m)	26	8	95-115 (70-85)	3036 (1377)	19,285.00
F41-2822	10'6" (3.20m)	28	8	101-122 (75-90)	3257 (1477)	19,995.00
<b>OPTIONAL EQUIPMENT</b>						
AB-01-0002	Feathering Blade with scraper for rear gang				Add 26 (12)	Add 260.00
	22" x 1/4"(6mm) Plain blades in lieu of standard				Add 1.9 (0.9)ea.	-0-
	24" x 1/4"(6mm) Cutout blades in lieu of standard				Add 6.9 (3.1)ea.	Add ea. 20.00
	24" x 1/4"(6mm) Plain blades in lieu of standard				Add 8.6 (3.9)ea.	Add ea. 20.00
	Shock Absorber bearing riser with 1-1/4" x 2" spring steel shank - Add per bearing				Add 21 (9.5) ea	Add ea 205.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**


P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# WHEEL OFFSET HARROWS



## MODEL "J41"

10-1/2" Spacing  
(J) series

General Purpose

### STANDARD SPECIFICATIONS

(Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" (38mm) square, high carbon cold rolled steel	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>BLADES:</b>	24" x 1/4"(6mm) Cutout with back up disc behind right front blade	<b>TRANSPORT FEATURES:</b>	Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
<b>SCRAPERS:</b>	HD high carbon steel blades on 1/2" x 1-1/2" shanks, mounted on 2" x 2" x 3/8" angle iron bars	<b>WHEELS:</b>	Two 15" x 6"-6 bolt hubs w/ 9.5Lx15" Tires, 8ply
<b>TONGUE:</b>	Adjustable with tongue jack	<b>WRENCHES:</b>	One for gang bolts
<b>HYDRAULIC CYLINDERS:</b>	4" x 8" Hyd Cylinder(3000 PSI). Includes hose bundle to tractor	<b>WEIGHT:</b>	124 to 155 lbs. (56 to 70kg) per blade 287 to 354 lbs. (427 to 527kg) per foot
<b>BEARING RISERS:</b>	Fabricated steel	<b>GANG ANGLE:</b>	17° to 23° front and rear
<b>SPACING:</b>	10-1/2 Inches (267mm)	<b>TRANSPORT WIDTH:</b>	Cutting width plus 6" (0.15m) plus additional 10" (0.3m) with feathering blades
<b>FINISH:</b>	Powder coated		

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
J41-1624	7'0" (2.13m)	16	6	68-88 (50-65)	2592 (1176)	\$17,420.00
J41-1824	7'10" (2.39m)	18	6	74-95 (55-70)	2739 (1242)	18,145.00
J41-2024	8'8" (2.64m)	20	6	81-101 (60-75)	2905 (1317)	19,090.00
J41-2224	9'6" (2.90m)	22	8	88-108 (65-80)	3154 (1430)	20,935.00
J41-2424	10'4" (3.15m)	24	8	95-115 (70-85)	3345 (1517)	21,880.00

OPTIONAL EQUIPMENT						
AB-01-0003	Feathering Blade with scraper for rear gang				Add 28 (13)	Add 320.00
	22" x 1/4"(6mm) Plain blades in lieu of standard				Ded 7.9 (3.6)ea.	Ded ea. 13.00
	22" x 1/4"(6mm) Cutout blades in lieu of standard				Ded 6.0 (2.7)ea.	Ded ea. 13.00
	24" x 1/4"(6mm) Plain blades in lieu of standard				Add 2.0 (0.9)ea.	Add ea. 0
	Shock Absorber bearing riser with 1-1/4" x 2" spring steel shank - Add per bearing				Add 21 (9.5) ea	Add ea 205.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



### AMCO Manufacturing Company

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)


[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)





# WHEEL OFFSET HARROWS

## MODEL "F42" (HEAVY DUTY)



**9" Spacing**

**(F) series**

**Primary Tillage**

### STANDARD SPECIFICATIONS (Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" square, high carbon cold rolled steel	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>BLADES:</b>	24" x 1/4"(6mm) Plain with diminishing leveling blades. Back up disc behind right front blade	<b>SPACING:</b>	9 Inches (229mm)
<b>SCRAPERS:</b>	Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.	<b>WHEELS:</b>	Dual 15" x 8" – 6 bolt hubs w/ 9.5Lx15" Tires, 8ply
<b>TONGUE:</b>	Adjustable, 88-1/2"(2.25m)long with tongue jack and base hitch clevis	<b>WEIGHT:</b>	164 to 197 lbs. (74 to 89 kg)per blade 439 to 525 lbs. per foot (653 to 781 kg. per meter)
<b>GANG ANGLE:</b>	17° to 25° front to rear	<b>TRANSPORT FEATURES:</b>	Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
<b>BEARING RISER:</b>	Fab steel, 16-3/4" high	<b>TRANSPORT WIDTH:</b>	Cutting width plus 12" (0.30m) plus additional 12"(0.30m) with feathering blades
<b>WRENCHES:</b>	2 for gang bolts	<b>HYDRAULIC CYLINDERS:</b>	4" x 8" x1-1/2" with stroke control on 50" (1.27m) main frame, 4" x 16" x2" on 86" (2.18m) main frame (each 3000PSI). Includes hose bundle to tractor
<b>FINISH:</b>	Powder coated		

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
<b>50"(1.27m) MAIN FRAME</b>						
F42-2224	8'3" (2.51m)	22	8	95-122 (70-90)	4146 (1880)	\$ 27,625.00
F42-2424	9'0" (2.74m)	24	8	108-142 (80-105)	4290 (1945)	28,390.00
F42-2824	10'6" (3.20m)	28	8	122-162 (90-120)	4785 (2170)	30,250.00
F42-3224	12'0" (3.66m)	32	10	135-190 (100-140)	5223 (2369)	32,775.00
<b>86" (2.18m) MAIN FRAME</b>						
F42B-3224	12'0" (3.66m)	32	10	149-203 (110-150)	6424 (2913)	38,367.00
F42B-3624	13'6" (4.11m)	36	12	162-216 (120-159)	6708 (3042)	40,450.00
F42B-4024	15'0" (4.57m)	40	12	182-236 (134-173)	7008 (3178)	42,477.00
F42B-4424*	16'6" (5.03m)	44	14	203-257 (150-189)	8057 (3654)	47,780.00
F42B-4824*	18'0" (5.30m)	48	16	216-270 (159-200)	8341 (3783)	50,425.00
*Equipped with auxiliary frames and clamps and 8 hole hub with 11Lx15" tires on 15" x 10" wheel in lieu of standard 6 hole hub						
<b>OPTIONAL EQUIPMENT</b>						
AB-01-0005	Feathering Blade with scraper for rear gang				Add 28 (13)	Add 320.00
	24"x1/4"(6mm) Cutout blades in lieu of standard				Ded 2.0 (0.9)ea.	-0-
	26"x1/4"(6mm) Plain blades in lieu of standard				Add 5.8 (2.6)ea.	Add ea. 26.00
	26"x1/4"(6mm) Cutout blades in lieu of standard				Add 3.8 (1.7)ea.	Add ea. 26.00
	Shock Absorber bearing riser with 1-1/4" x 2-1/2" spring steel shank - Add per bearing				Add 21 (9.5) ea	Add ea 215.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# WHEEL OFFSET HARROWS

## MODEL "J42" (HEAVY DUTY)


10-1/2" Spacing

(J) series

Primary Tillage

### STANDARD SPECIFICATIONS

(Metrics in Parentheses)



<b>AXLES:</b>	1-1/2" square, high carbon cold rolled steel	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>BLADES:</b>	24" x 1/4"(6mm) Plain with diminishing leveling blades. Back up disc behind right front blade	<b>BEARING RISERS:</b>	Fabricated steel, 16-3/4" high
<b>SCRAPERS:</b>	Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.	<b>WHEELS:</b>	Dual 15" x 8" - 6 bolt hubs w/ 9.5Lx15" Tires, 8ply * Dual 15" x 10" - 8 bolt hubs w/ 11Lx15" Tires, 8ply
<b>TONGUE:</b>	Adjustable, 88-1/2"(2.25m)long with tongue jack and base hitch clevis	<b>TRANSPORT FEATURES:</b>	Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
<b>GANG ANGLE:</b>	17° to 25° front to rear	<b>WEIGHT:</b>	179 to 208 lbs. (81 to 94 kg)per blade 422 to 480 lbs. per foot (628 to 714kg. per meter)
<b>WRENCHES:</b>	2 for gang bolts	<b>TRANSPORT WIDTH:</b>	Cutting width plus 12" (0.30m) plus additional 12"(0.30m) with feathering blades
<b>SPACING:</b>	10-1/2 Inches (267mm)	<b>HYDRAULIC CYLINDERS:</b>	4" x 8" x 1-1/2" with stroke control on 50" (1.27m) main frame, 4" x 16" x 2" on 86"(2.18m) main frame (each 3000PSI). Includes hoses to tractor
<b>FINISH:</b>	Powder coated		

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
<b>50"(1.27m) MAIN FRAME</b>						
J42-2024	8'8"(2.64m)	20	6	101-128 (75-95)	3937 (1785)	\$ 26,090.00
J42-2424	10'4"(3.15m)	24	8	122-162 (90-120)	4614 (2092)	29,210.00
J42-2824	12'0"(3.66m)	28	10	135-176 (100-130)	5037 (2284)	31,895.00
<b>86" (2.18m) MAIN FRAME</b>						
J42B-2824	12'0"(3.66m)	28	10	149-189 (110-139)	6063 (2750)	37,100.00
J42B-3224	13'8"(4.17m)	32	12	169-203 (125-150)	6558 (2974)	39,790.00
J42B-3624	15'4"(4.67m)	36	12	189-236 (139-174)	6910 (3134)	41,435.00
J42B-4024*	17'0"(5.18m)	40	12	216-257 (159-189)	7803 (3539)	45,820.00
J42B-4424*	18'8"(5.69m)	44	16	236-277 (174-204)	8389 (3805)	49,710.00
J42B-4824*	20'6"(6.25m)	48	16	257-297 (189-218)	8741 (3964)	51,410.00
AB-01-0005	*Equipped with auxiliary frames and clamps and 8 hole hub with 11Lx15" tires on 15" x 10" wheel in lieu of standard 6 hole hub <b>OPTIONAL EQUIPMENT</b> Feathering Blade with scraper for rear gang				Add 28 (13)	Add 320.00
	24"x1/4"(6mm) Cutout blades in lieu of standard				Ded 2.0 (0.9)ea.	-0-
	26"x1/4"(6mm) Plain blades in lieu of standard				Add 5.8 (2.6)ea.	Add ea. 26.00
	26"x1/4"(6mm) Cutout blades in lieu of standard				Add 3.8 (1.7)ea.	Add ea. 26.00
	Shock Absorber bearing riser with 1-1/4" x 2-1/2" spring steel shank - Add per bearing				Add 21 (9.5) ea	Add ea. 215.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**  
P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)  
[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)




# WHEEL OFFSET HARROWS

## MODEL "J42B" (FOLDING)

10-1/2" Spacing

(J) series

Primary Tillage



### STANDARD SPECIFICATIONS

(Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" square, high carbon cold rolled steel	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>BLADES:</b>	24" x 1/4"(6mm) Plain with diminishing leveling blades. Back up disc behind right front blade	<b>BEARING RISERS:</b>	Fabricated steel, 16-3/4" high
<b>SCRAPERS:</b>	Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.	<b>WHEELS:</b>	Dual 15" x 10" - 8 bolt hubs w/ 11Lx15" Tires, 8ply
<b>TONGUE:</b>	Adjustable, 88-1/2"(2.25m)long with tongue jack and base hitch clevis	<b>TRANSPORT FEATURES:</b>	Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
<b>GANG ANGLE:</b>	17° to 25° front to rear	<b>WEIGHT:</b>	179 to 208 lbs. (81 to 94 kg)per blade 422 to 480 lbs. per foot (628 to 714kg. per meter)
<b>WRENCHES:</b>	2 for gang bolts	<b>TRANSPORT WIDTH:</b>	15' when folded up
<b>SPACING:</b>	10-1/2 Inches (267mm)	<b>HYDRAULIC CYLINDERS:</b>	4" x 16" Hydraulic Cylinder for the mail frame, and 3" x 24" Hydraulic Cylinders for the wings (each 3000PSI). Includes hoses to tractor
<b>FINISH:</b>	Powder coated		

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
J42B-4424C-FLEX-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	\$51,570.00
J42B-4424C-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	58,160.00
J42B-4424CS-FLEX-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	61,570.00
J42B-4424CS-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	58,160.00
J42B-4424S-FLEX-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	61,570.00
J42B-4424S-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	58,160.00
J42B-4426C-FLEX-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	62,220.00
J42B-4426C-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	58,795.00
J42B-4426CS-FLEX-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	62,220.00
J42B-4426CS-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	58,795.00
J42B-4426S-FLEX-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	62,220.00
J42B-4426S-FOLD	18'8" (5.49m)	44	16	236-277 (176-207)	9450 (4286)	58,795.00
J42B-4824C-FLEX-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	\$62,780.00
J42B-4824C-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	59,375.00
J42B-4824CS-FLEX-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	62,780.00
J42B-4824CS-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	59,375.00
J42B-4824S-FLEX-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	62,780.00
J42B-4824S-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	59,375.00
J42B-4826C-FLEX-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	63,590.00
J42B-4826C-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	60,155.00
J42B-4826CS-FLEX-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	63,590.00
J42B-4826CS-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	60,155.00
J42B-4826S-FLEX-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	63,590.00
J42B-4826S-FOLD	20'6" (6.25m)	48	16	257-300 (192-224)	10100 (4581)	60,155.00



### AMCO Manufacturing Company

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA

(800)748-9022 (662)746-4464 Fax (662)746-6825


[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOMManufacturingInc](https://www.facebook.com/AMCOMManufacturingInc)



# WHEEL OFFSET HARROWS

## MODEL "J43" (EXTRA HEAVY DUTY)



10-1/2" Spacing  
(J) series  
Primary Tillage

### STANDARD SPECIFICATIONS (Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" square, high carbon cold rolled steel	<b>BEARINGS:</b>	Protect-O-Shield®, extra heavy duty, 2-11/16" (68mm) sq. bore greasable ball type, toggle mounted, with zerk guards and wear guards
<b>BLADES:</b>	24" x 1/4"(6mm) Plain with diminishing leveling blades. Back up disc behind right front blade	<b>2 Year Warranty</b>	
		<b>On Bearings!</b>	
<b>SCRAPERS:</b>	Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scraper are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.	<b>BEARING RISERS:</b>	Spring steel shock absorber
<b>TONGUE:</b>	Adjustable, 88-1/2"(2.25m)long with tongue jack and base hitch clevis	<b>WHEELS:</b>	Dual 15" x 8" - 6 bolt hubs w/ 9.5Lx15" Tires, 8ply <b>* Dual 15" x 10" - 8 bolt hubs w/ 11Lx15" Tires, 8ply</b>
<b>GANG ANGLE:</b>	17° to 25° front to rear	<b>TRANSPORT</b>	Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
<b>FINISH:</b>	Powder coated	<b>FEATURES:</b>	2 for gang bolts
<b>TRANSPORT</b>	Cutting width plus 12" (0.30m)	<b>WRENCHES:</b>	205 to 231 lbs. (93 to 105 kg) per blade
<b>WIDTH:</b>	plus additional 12" (0.30m) with feathering blades	<b>WEIGHT:</b>	483 to 533lbs. per foot(719 to 793kg. per meter)
<b>SPACING:</b>	10-1/2 Inches (267mm)	<b>HYDRAULIC</b>	4" x 8" x 1-1/2" with stroke control on
		<b>CYLINDERS:</b>	50" (1.27m) main frame, 4" x 16" x 2" on 86" (2.18m) main frame (each 3000 PSI). Includes hose bundle to tractor.

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
<b>50"(1.27m) MAIN FRAME</b>						
J43-2024	8'8"(2.64m)	20	6	115-135 (85-100)	4303 (1951)	\$ 29,700.00
J43-2424	10'4"(3.15m)	24	8	122-162 (90-120)	5036 (2284)	33,595.00
J43-2824	12'0"(3.66m)	28	10	149-189 (110-140)	5617 (2547)	36,590.00
<b>86" (2.18m) MAIN FRAME</b>						
J43B-2824	12'0"(3.66m)	28	10	162-203 (120-150)	6616 (3000)	\$41,480.00
J43B-3224	13'8"(4.17m)	32	12	176-230 (130-170)	7213 (3271)	44,100.00
J43B-3624*	15'4"(4.67m)	36	12	189-243 (140-180)	8074 (3662)	49,125.00
J43B-4024*	17'0"(5.18m)	40	12	216-270 (160-200)	8533 (3870)	51,206.00
J43B-4424*	18'8"(5.69m)	44	16	243-304 (180-225)	9283 (4210)	56,585.00
	*Equipped with auxiliary frames and clamps and 8 hole hub with 11Lx15" tires on 15" x 10" wheel in lieu of standard 6 hole hub					
<b>OPTIONAL EQUIPMENT</b>						
AB-01-0005	Feathering Blade with scraper for rear gang				Add 28 (13)	Add 320.00
	24"x1/4"(6mm) Cutout blades in lieu of standard				Ded 2.0 (0.9)ea.	-0-
	26"x1/4"(6mm) Plain blades in lieu of standard				Add 5.8 (2.6)ea.	Add ea. 26.00
	26"x1/4"(6mm) Cutout blades in lieu of standard				Add 3.8 (1.7)ea.	Add ea. 26.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing, Inc.**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825


[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# WHEEL OFFSET HARROWS

## MODEL "J44" (EXTRA HEAVY DUTY)



10-1/2" Spacing  
(J) series  
Primary Tillage

### STANDARD SPECIFICATIONS (Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" square, high carbon cold rolled steel	<b>BEARINGS:</b>	Protect-O-Shield® , extra heavy duty, 2-11/16" (68mm) sq. bore greasable ball type, toggle mounted, with zerk guards and wear guards
<b>BLADES:</b>	24" x 1/4"(6mm) Plain with diminishing leveling blades. Back up disc behind each blade.	<b>2 Year Warranty On Bearings!</b>	<b>BEARING RISERS:</b> Spring steel shock absorbers
<b>SCRAPERS:</b>	Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.	<b>WHEELS:</b>	Dual 15" x 8" - 6 bolt hubs w/ 9.5Lx15" Tires, 8ply <b>* Dual 15" x 10" - 8 bolt hubs w/ 11Lx15" Tires, 8ply</b>
<b>TONGUE:</b>	Adjustable, 88-1/2"(2.25m)long with tongue jack and base hitch clevis	<b>TRANSPORT FEATURES:</b>	Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
<b>GANG ANGLE:</b>	17° to 25° front to rear	<b>WRENCHES:</b>	2 for gang bolts
<b>TRANSPORT WIDTH:</b>	Cutting width plus 12" (0.30m) plus additional 12" (0.30) with feathering blades	<b>WEIGHT:</b>	210 to 327 lbs. (95 to 108kg) per blade 495 to 546 lbs. per foot (737 to 812 kg/meter)
<b>FINISH:</b>	Powder coated	<b>HYDRAULIC CYLINDERS:</b>	4" x 8" x 1-1/2" with stroke control on 50" (1.27m)main frame, 4" x 16" x 2" on 86" (2.18m) main frame (each 3000PSI). Includes hose bundle to tractor
<b>SPACING:</b>	10-1/2 Inches (267mm)		

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
<b>50"(1.27m)MAIN FRAME</b>						
J44-2024	8'8" (2.64m)	20	6	128-162 (95-120)	4464 (2024)	\$30,658.00
J44-2424	10'4" (3.15m)	24	8	149-176 (110-130)	5222 (2368)	34,560.00
<b>86" (2.18m) MAIN FRAME</b>						
J44B-2824	12'0" (3.66m)	28	10	162-216 (120-160)	6848 (3106)	42,530.00
J44B-3224	13'8" (4.17m)	32	12	176-230 (130-170)	7467 (3386)	46,335.00
J44B-3624*	15'4" (4.67m)	36	12	189-243 (140-180)	8406 (3812)	50,970.00
J44B-4024*	17'0" (5.18m)	40	16	216-270 (160-200)	9221 (4182)	56,640.00
J44B-4424*	18'8" (5.69m)	44	16	243-304 (180-225)	9626 (4366)	59,175.00
AC-01-0005	*Equipped with auxiliary frames and clamps and 8 hole hub with 11Lx15" tires on 15" x 10" wheel in lieu of standard 6 hole hub <b>NOTE: All J44 units have split gangs</b> <b>OPTIONAL EQUIPMENT</b> Feathering Blade with scraper for rear gang				Add 26 (12)	Add 390.00
	24"x1/4"(6mm) Cut out blades in lieu of standard				Ded 2.0 (0.9)ea.	-0-
	26"x1/4"(6mm) Plain blades in lieu of standard				Add 5.8 (2.6)ea.	Add ea. 26.00
	26"x1/4"(6mm) Cut out blades in lieu of standard				Add 3.8 (1.7)ea.	Add ea. 26.00
	26"x5/16" Plain blades in lieu of standard				Add 18 (8)ea.	Add ea. 62.00
	26"x5/16" Cut out blades in lieu of standard				Add 16 (7)ea.	Add ea. 62.00
	28"x5/16" Plain blades in lieu of standard				Add 22 (9)ea.	Add ea. 107.00
	28"x5/16" Cut out blades in lieu of standard				Add 20 (9)ea.	Add ea. 107.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**  
P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825  
[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# WHEEL OFFSET HARROWS



## MODEL "G2"

12-1/2" Spacing  
(G) series

Heavy Primary Tillage

### STANDARD SPECIFICATIONS

(Metrics in Parentheses)

<b>AXLES:</b>	2-1/4" (57mm) round, high carbon cold finished steel	<b>BEARINGS:</b>	Protect-O-Shield®, 2-3/4" bore greaseable ball type, toggle mounted, with wear and zerk guards
<b>BLADES:</b>	32" x 3/8" (10mm) Cut out with 14"x3/16" (4.8mm) back up blades	<b>2 Year Warranty On Bearings!</b>	
<b>SCRAPERS:</b>	Extra heavy duty moldboard type with 5/8" x 3" shank	<b>TRANSPORT FEATURES:</b>	Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
<b>TONGUE:</b>	Adjustable, 92" long with tongue jack and base hitch clevis	<b>WRENCH:</b>	One for gang bolt
<b>GANG ANGLE:</b>	20° to 27° front and rear	<b>WEIGHT:</b>	379-502 lbs (172-228 kg) per blade, 758-975 lbs per foot(1128-1451 kg per meter)
<b>WHEELS:</b>	Dual 15" x 10" with extra HD 8 bolt hub with 12.5Lx15" Tires, 12ply	<b>TRANSPORT WIDTH:</b>	Cutting width plus 12 inches
<b>BEARING RISERS:</b>	Fabricated steel	<b>HYDRAULIC CYLINDERS:</b>	5" x 16" x 2-1/2" Hyd. Cylinder w/special clevis and hose bundle to tractor, including hose holder
<b>SPACING:</b>	12-1/2" (318MM)		
<b>FINISH:</b>	Powder coated		

Model No.	Cutting Width	No. of Discs	No. of Bearings	Crawler Approximate Engine HP Required	Rubber Tired Approximate Engine HP Required	Approximate Weight lbs (kg)	Factory List Price
<b>TAPERED GANGS</b>							
G2-2032	10'4"(3.15M)	20	8	135-162	202-243	10179 (4617)	\$ 67,760.00
G2-2432	12'4"(3.76M)	24	12	149-176	216-264	11767 (5337)	77,725.00
G2-2832	14'4"(4.37M)	28	12	162-203	243-304	12508 (5673)	82,240.00
G2-3232	16'4"(4.98M)	32	16	189-236	284-365	14113 (6401)	92,315.00
G2-3632	18'4"(5.59M)	36	16	216-270	324-405	14821 (6722)	97,185.00
<b>OPTIONAL EQUIPMENT</b>							
JA-01-0026	Feathering Blade with scraper					Add 110 (50.0)	Add 558.00
	32"x3/8" (10mm) Plain blades in lieu of standard					Add 35 (16)ea.	-0-
	36"x1/2" (10mm) Cut out blades in lieu of standard					Add 50 (22)ea.	Add ea. 264.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**




**AMCO Manufacturing Company**  
P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# LIFT TANDEM DOUBLE OFFSET



## MODEL "LTF 100"

9" Spacing

(F) series

Primary Tillage

### STANDARD SPECIFICATIONS (Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" square, high-carbon cold rolled steel	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>BLADES:</b>	18" x 1/4" Cut out blades on small frame 22" x 1/4" Cut out blades on large frame	<b>BEARING RISERS:</b>	Spring steel shock absorbers
<b>SCRAPERS:</b>	High-carbon replaceable blades on heavy duty shanks, mounted with grade 5 bolts on high-grade angle iron bars	<b>SPACING:</b>	9"
<b>GANG ANGLE:</b>	Adjustable 14° to 18°	<b>WEIGHT/BLADE:</b>	~90-100 lbs per blade
<b>FINISH:</b>	Powder coated	<b>TRANSPORT:</b>	Width same as cutting width plus 6"
		<b>HITCH:</b>	Small Frame - Cat I Large Frame - Cat II and III

Model No.	Cutting Width	No. of Discs	Disc Size	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
<b>LTF 100 (Small Frame)</b>							
LTF 100-1618	6'	16	18x1/4"	8	32-47 (25-35)	1600 (727.3)	\$ 10,980.00
LTF 100-2018	7'3"	20	18x1/4"	8	41-52 (30-40)	1750 (795.5)	11,620.00
<b>LTF 100B (Large Frame)</b>							
LTF 100B-2022	7'3"	20	22x1/4"	8	60 (45)	2450 (1113.6)	13,750.00
LTF 100B-2422	8'7"	24	22x1/4"	8	80 (45)	2700 (1227.3)	14,550.00
LTF 100B-2822	10'2"	28	22x1/4"	8	100 (60)	2900 (1318.2)	15,505.00
LTF 100B-3222*	12'	32	22x1/4"	8	110 (82)	3131 (1420.2)	17,160.00

**\*The LTF 100B-3222 will not be assembled at AMCO for more economical freight rate**

**Note:** LTF100B-3222 Equipped with auxiliary frames and clamps

#### OPTIONAL EQUIPMENT

AB-01-0002	Feathering blade with scraper for rear gang (requires 2)	Add 26 (12)	Add 260.00
BH-01-0033	Drag Board Kit	Add 51 (23.2)	Add 510.00



AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**





### AMCO Manufacturing Company

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)

# DOUBLE OFFSET TANDEM

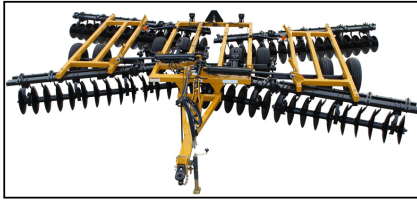

## MODEL "F15B"

9" Spacing

(F) series

16'6", 18'0", 19'6", 21'0", 24'0" Sizes

General Purpose - Workhorse

STANDARD SPECIFICATIONS

(Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" square, high carbon cold rolled steel	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>BLADES:</b>	22" x 1/4"(6mm) Plain diminishing with two feathering blades on rear gang	<b>BEARING RISERS:</b>	Fabricated steel
<b>SCRAPERS:</b>	Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.	<b>WHEELS:</b>	4 - 15" x 8" w/ 9.5Lx15" Tires, 8ply Center Sec. 2 - 15" x 8" w/ 9.5Lx15" Tires, 8ply Wing Sec. * 4 - 15" x 8" w/ 11Lx15" Tires, 8ply Center Sec. 4 - 15" x 8" w/ 9.5Lx15" Tires, 8ply Wing Sec.
<b>TONGUE:</b>	90" long with tongue jack & base hitch clevis	<b>HUBS:</b>	Standard duty 6 lug only
<b>FINISH:</b>	Powder coated	<b>TRANSPORT:</b>	Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
<b>HYDRAULIC:</b>	2 - 4"x8" w/depth control	<b>FEATURES:</b>	
<b>CYLINDERS:</b>	(3000 PSI). 2 - 4"x24" for folding wings	<b>GANG ANGLE:</b>	Preset at 17°. No adjustment necessary
<b>HYDRAULIC:</b>	1/4" complete to front of main	<b>WEIGHT:</b>	122 to 140 lbs per blade 337 to 389 lbs per foot
<b>HOSES:</b>	frame. Includes hose bundle to tractor	<b>TRANSPORT:</b>	Width - 12'6" for all models Height - 9'6", 10'3", 11'0", 11'9", 12'6"
<b>WRENCH:</b>	1 for gang bolt		
<b>DISC SPACING:</b>	9 Inches		

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
<b>50"(1.27m) MAIN FRAME</b>						
F15B-4622	16'6" (5.03m)	46	16	155-176 (115-130)	6705 (3041)	\$ 48,455.00
F15B-5022	18'0" (5.49m)	50	16	162-189 (120-140)	7419 (3587)	49,600.00
F15B-5422	19'6" (5.95m)	54	16	169-203 (125-150)	7623 (3457)	51,525.00
F15B-5822*	21'0" (6.41m)	58	16	182-223 (135-165)	8346 (3785)	56,730.00
F15B-6622*	24'0" (7.32m)	66	20	202-243 (150-180)	9306 (4221)	58,645.00
<b>OPTIONAL EQUIPMENT</b>						
Shock absorber gang risers in lieu of Std. cast gang risers, Add per bearing					Add 18 (8) ea	Add ea. 205.00
(Note: AMCO recommends 1/4"(6mm) blades for use with shock absorber gangs)						
22" x 1/4"(6mm) Cutout blades in lieu of standard					Ded 1.9 (0.9)ea.	-0-
24" x 1/4"(6mm) Cutout blades in lieu of standard					Add 4.0 (1.8)ea.	Add ea. 20.00
24" x 1/4"(6mm) Plain blades in lieu of standard					Add 6.0 (2.8)ea.	Add ea. 20.00
26" x 1/4"(6mm) Cutout blades in lieu of standard					Add 7.8 (3.7)ea.	Add ea. 50.00
26" x 1/4"(6mm) Plain blades in lieu of standard					Add 9.8 (4.7)ea.	Add ea. 50.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA


(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# DOUBLE OFFSET TANDEM



## MODEL "F15"

9" spacing  
(F) series

24'0", 27'0", 30'0" Sizes

**Heavy Primary Tillage – Heavy Duty**  
**STANDARD SPECIFICATIONS**

(Metrics in Parentheses)



- |   |  |
|---|--|
| <b>AXLES:</b> 1-1/2" square, high carbon cold rolled steel  | <b>HYDRAULIC HOSES:</b> 1/4" complete to front of main frame. Includes hose bundle to tractor  |
| <b>BLADES:</b> 24"x1/4"(6mm) Plain Diminishing with two feathering blades on rear gangs   | <b>BEARINGS:</b> Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication  |
| <b>SCRAPERS:</b> Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts. | <b>BEARING RISERS:</b> Fabricated steel  |
| <b>TONGUE:</b> 90" long with tongue jack and base hitch clevis  | <b>WHEELS:</b> 4 – 15" x 10" w/ 12.5Lx15" Tires, 12ply Center Sec.<br>4 – 15" x 8" w/ 11Lx15" Tires, 8ply Wing Sec.<br>4 – 15" x 10" w/ 11Lx15" Tires, 8ply Center Sec. (66 blade) *<br>4 – 15" x 8" w/ 11Lx15" Tires, 8ply Wing Sec. (only) |
| <b>FRONT WING DEPTH GAUGE WHEEL &amp; TIRE:</b> With adj. ratchet jack on 27' & 30' models  | <b>HUBS:</b> HD 6 lug for center sec. and std. 6 lug on wings.   |
| <b>HYD CYLINDERS:</b> 2 – 4"x12" center lift w/DIAL–A–DEPTH depth control (3000 PSI)<br>2 – 3-1/2"x12" wing lift w/DIAL–A–DEPTH depth control (3000 PSI)<br>2 – 4"x24" for folding wings (3000 PSI)   | <b>DISC SPACING:</b> 9 Inches  |
| <b>BEARING RISERS:</b> Fabricated steel   | <b>GANG ANGLE:</b> Preset at 17°. No adjustment necessary  |
| <b>DISC SPACING:</b> 9 Inches   | <b>WEIGHT:</b> 135 to 145 lbs per blade<br>375 to 390 lbs per foot   |
| <b>FINISH:</b> Powder coated  | <b>TRANSPORT FEATURES:</b> Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.   |
| <b>WRENCH:</b> 1 for gang bolt  | <b>TRANSPORT:</b> Width – 14'6"<br>Height – 12'0" on 27', 13'3", on 30' Models   |

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
<b>F15-6624*</b>	24'0" (7.3m)	66	20	230-275 (170-205)	11591 (5257)	\$ 73,886.00
<b>F15-7424</b>	27'0" (8.24m)	74	22	243-297 (180-220)	12283 (5571)	81,283.00
<b>F15-8224</b>	30'0" (9.15m)	82	22	256-318 (190-235)	12935 (5867)	84,525.00
<b>OPTIONAL EQUIPMENT</b>						
<b>(Note: When upgrade to 8 lug hub you must use 15" x 10" wheel)</b>						
Shock absorber gang risers in lieu of Std. cast gang risers, Add per bearing					Add 18 (8) ea	Add ea. 205.00
<b>(Note: AMCO recommends 1/4"(6mm) blades for use with shock absorber gangs)</b>						
(4) Heavy Duty 8 hole hub and wheel in lieu of standard 6 hole (Center section only)					Add 20.0 (9.1)	Add 665.00
AN-20-0001	15" x 10" wheels in lieu of 15" x 8" standard				Add 6.0 (2.7)ea.	-0-
BC-01-0003	22" x 1/4"(6mm) Plain blades in lieu of standard				Ded 6.0 (2.7)ea.	Ded ea. 13.00
	22" x 1/4"(6mm) Cutout blades in lieu of standard				Ded 7.9 (3.6)ea.	Ded ea. 13.00
	24" x 1/4"(6mm) Cutout blades in lieu of standard				Ded 2.0 (0.9)ea.	-0-
	26" x 1/4"(6mm) Cutout blades in lieu of standard				Add 3.8 (1.8)ea.	Add ea. 26.00
	26" x 1/4"(6mm) Plain blades in lieu of standard				Add 5.8 (2.8)ea.	Add ea. 26.00
	Hydraulic Tongue Adjust Kit <b>*New*</b>					1,395.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA


(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](http://www.facebook.com/AMCOManufacturingInc)



# DOUBLE OFFSET TANDEM



## MODEL "F15"

9" Spacing  
(F) series

34'6" AND 39'0" Sizes  
**Heavy Primary Tillage – Giant**  
STANDARD SPECIFICATIONS  
(Metrics in Parentheses)

<b>AXLES:</b> 1-1/2" square, high carbon cold rolled steel	<b>HYDRAULIC HOSES:</b> 1/4" complete to front of main Includes hose bundle to tractor
<b>BLADES:</b> 24" x 1/4"(6mm) Plain with diminishing leveling blades	<b>BEARINGS:</b> Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>SCRAPERS:</b> Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.	<b>BEARING RISERS:</b> Fabricated steel
<b>TONGUE:</b> 90" long with tongue jack & base hitch clevis	<b>WHEELS:</b> 4 – 15" x 10" w/ 12.5Lx15" Tires, 12ply Center Sec. 4 – 15" x 8" w/ 11Lx15" Tires, 8ply Wing Sec.
<b>FRONT WING DEPTH GAUGE WHEEL &amp; TIRE:</b> With adj. ratchet jack on 34'6" & 39' models	<b>HUBS:</b> 8 lug hub on center sec. and std. 6 on wings.
<b>HYDRAULIC CYLINDERS:</b>	<b>WRENCH:</b> 1 for gang bolt
2 – 4"x12" center lift w/DIAL-A-DEPTH depth control (3000 PSI)	<b>GANG ANGLE:</b> Preset at 17°. No adjustment necessary
2 – 3-1/2"x12" wing lift w/DIAL-A- DEPTH depth control (3000 PSI)	<b>WEIGHT:</b> 135 to 145 lbs per blade 375 to 390 lbs per foot
4 – 4"x24" for folding wings (2500 PSI)	<b>TRANSPORT</b> <b>FEATURES:</b> Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
<b>DISC SPACING:</b> 9 Inches	<b>TRANSPORT WIDTH:</b> Under 17'6"
<b>FINISH:</b> Powder coated	<b>TRANSPORT HEIGHT:</b> 14'0" on 34'6" , 15'9" on 39'0" Model

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kg)	Approximate Weight lbs (kg)	Factory List Price
F15- 9424	34'6" (10.52m)	94	26	310-378 (230-280)	15423 (6995)	\$ 95,850.00
F15-10624	39'0" (11.90m)	106	30	337-405 (250-300)	16671 (7561)	103,225.00
<b>OPTIONAL EQUIPMENT</b>						
AN-20-0001	15" x 10" wheels in lieu of 15" x 8" standard				Add 6.0 (2.7)ea.	-0-
	Shock absorber gang risers in lieu of Std. cast gang risers, Add per bearing				Add 18 (8) ea	Add ea. 205.00
	(Note: AMCO recommends 1/4"(6mm) blades for use with shock absorber gangs)					
AN-20-0001	15" x 10" wheels in lieu of 15" x 8" standard				Add 6.0 (2.7)ea.	-0-
	22" x 1/4"(6mm) Plain blades in lieu of standard				Ded 6.0 (2.7)ea.	Ded ea. 13.00
	22" x 1/4"(6mm) Cutout blades in lieu of standard				Ded 7.9 (3.6)ea.	Ded ea. 13.00
	24" x 1/4"(6mm) Cutout blades in lieu of standard				Ded 2.0 (0.9)ea.	-0-
	26" x 1/4"(6mm) Cutout blades in lieu of standard				Add 3.8 (1.8)ea.	Add ea. 26.00
	26" x 1/4"(6mm) Plain blades in lieu of standard				Add 5.8 (2.8)ea.	Add ea. 26.00
BC-01-0003	Hydraulic Tongue Adjust Kit <b>*New*</b>					1,395.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**




**AMCO Manufacturing Company**  
P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)

# DOUBLE OFFSET TANDEM



## MODEL "F17"

9" spacing

(F) series

General Purpose

### STANDARD SPECIFICATIONS

(Metrics in Parentheses)

- AXLES:** Four 1-1/2" square, high carbon cold rolled steel
- BLADES:** 22" x 1/4"(6mm) Plain diminishing with two feathering blades on rear gang
- SCRAPERS:** Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.
- TONGUE:** 90" long with tongue jack & base hitch clevis reversible ductile iron clevis
- HYDRAULIC CYLINDERS:** 4" x 8" x 1/2" w/stroke control (3000 PSI). Includes hose bundle to tractor
- DISC SPACING:** 9 Inches
- FINISH:** Powder coated
- BEARINGS:** Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
- BEARING RISERS:** Fabricated steel
- WHEELS:** 2 - 15" x 8" w/ 9.5Lx15" Tires, 8ply on 9'3", 10'6", 12'0"  
\* 4 - 15" x 8" w/ 9.5Lx15" Tires, 8ply (13'6", 15' and 16'6")
- HUBS:** std. 6 lug hubs
- WRENCH:** One for gang bolts
- GANG ANGLE:** Adjustable 18° to 22° Front, 17° to 21° Rear
- WEIGHT:** 106 to 120 lbs per blade  
296 to 337 lbs. per foot
- TRANSPORT FEATURES:** Light kits, safety chains & a slow moving vehicle sign are standard equipment. Including brackets & electric wiring to the tractor.
- TRANSPORT WIDTH:** Width of cut plus 18"

Model No.	Cutting Width	No. of Discs	No. of Bearings	Approximate Engine HP Required (kw)	Approximate Weight lbs (kg)	Factory List Price
F17-2622	9'3" (2.82m)	26	8	68-101 (50-75)	3414 (1548)	\$ 22,255.00
F17-3022	10'6" (3.20m)	30	8	81-108 (60-80)	3698 (1677)	23,450.00
F17-3422	12'0" (3.66m)	34	8	95-122 (70-90)	3982 (1806)	24,665.00
F17-3822*	13'6" (4.12m)	38	12	108-135 (80-100)	4816 (2184)	29,870.00
F17-4222*	15'0" (4.68m)	42	12	122-155 (90-115)	5130 (2326)	31,075.00
F17-4622*	16'6" (5.15m)	46	12	142-176 (105-130)	5644 (2560)	32,330.00
	*Includes 2 outrigger bars and clamps					
	<b>OPTIONAL EQUIPMENT</b>					
	Shock absorber gang risers in lieu of Std. cast gang risers Add per bearing			Add	18 (8) ea	Add ea. 205.00
	(Note: AMCO recommends 1/4" (6mm) blades for use with shock absorber gangs)					
BR-14-0001	15" x 8" dual wheels with 9.5L in lieu of single on 9'3", 10'6", 12'0"			Add	106.0 (2.8)ea.	Add ea. 1,475.00
BR-14-0006	15" x 8" dual wheels with 11L in lieu of single on 9'3", 10'6", 12'0"			Add	106.0 (2.8)ea.	Add ea. 1,625.00
	22" x 1/4"(6mm) Cutout blades in lieu of standard			Ded	1.9 (0.9)ea.	-0-
	24" x 1/4"(6mm) Cutout blades in lieu of standard			Add	4.0 (1.8)ea.	Add ea. 20.00
	24" x 1/4"(6mm) Plain blades in lieu of standard			Add	6.0 (2.8)ea.	Add ea. 20.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



### AMCO Manufacturing Company

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA

(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# HYDRAULIC TERRACING PLOW



## MODEL "TJ3"

10-1/2" Spacing  
(J) series

### STANDARD SPECIFICATIONS

(Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" square, high carbon cold rolled steel	<b>TILT INDICATOR:</b>	Allows positive setting of gangs at desired tilt from drivers seat
<b>BLADES:</b>	26" x 1/4"(6mm) Plain with 10" backup blades on inside and outside blades, with two 20" x 1/4" end blades with 10" backup blades	<b>MAIN FRAME:</b>	7" X 7" X 3/8" Tool bar with ASAE Cat. III hitch for quick coupler and conventional three point
<b>SCRAPERS:</b>	Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>GANG ANGLE:</b>	Adjustable from 21° to 29°	<b>SPACER SPOOLS:</b>	Fabricated steel
<b>GANG TILT:</b>	Hydraulically controlled from 18° down to 43° up	<b>TRANSPORT WIDTH:</b>	9'
<b>WEIGHT:</b>	201 lbs per blade, 190 lbs per foot	<b>WRENCH:</b>	One for gang bolts
<b>FINISH:</b>	Powder coated	<b>PARKING STANDS:</b>	Two
		<b>HYD. CYLINDERS:</b>	Two 4"x16" independent (3000 PSI)
		<b>HYDRAULIC HOSES:</b>	Four 3/8" diameter hoses to mount from hydraulic cylinders to tractor
		<b>GANG FRAME:</b>	6" X 4" X 3/8" Welded Tube

Model No.	Width of Unit	No. of Discs	No. of Bearings	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
TJ3-1826	16'10"	18	6	176-270 (130-200)	3212 (1460)	\$ 21,060.00
<b>OPTIONAL EQUIPMENT</b>						
Shock absorber gang risers in lieu of Std. cast gang risers, Add per bearing					Add 18 (8.2) ea	Add ea 215.00
26"x1/4"(6mm) cutout blades in lieu of standard					Ded 1.5 (0.7)ea.	-0-



AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



### AMCO Manufacturing Company

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# HYDRAULIC LEVEE PLOW



**MODELS "LF6" and "LJ6"**  
*9" or 10-1/2" Spacing*  
*(F) & (J) series*

**STANDARD SPECIFICATIONS**  
**(Metrics in Parentheses)**

<b>AXLES:</b>	1-1/2" sq, high carbon cold rolled steel	<b>GANG ANGLE:</b>	18° to 28°
<b>BLADES:</b>	24" x 1/4"(6mm) Plain with 10" backup blade behind outside blades,	<b>TILT INDICATOR:</b>	One to mount with 3" x 8" Hyd. Cylinder for adjustment on the go.
<b>SCRAPERS:</b>	Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.	<b>MAIN FRAME:</b>	7" X 4" X 3/8" Tool bar with ASAE Cat. II and Cat. III hitch for quick coupler and conventional three point
<b>GANG TILT:</b>	Hydraulically controlled-on-the-go adjustment	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>HYD. CYLINDERS:</b>	One 3" x 8" and one 3-1/4" x 8" rephasing cylinders to control tilt	<b>SPACING:</b>	9" on LF6, 10-1/2" on LJ6
<b>HYDRAULIC HOSES:</b>	3/8" dia. Hoses to mount from hydraulic cylinders to tractor.	<b>SPACER SPOOLS:</b>	Fabricated steel
<b>FINISH:</b>	Powder coated	<b>TRANSPORT WIDTH:</b>	9'
		<b>WRENCH:</b>	One for gang bolts

Model No.	Adjustable Cutting Width	No. of Discs	Blade Spacing	Approximate Engine HP Required (kW)	Approximate Weight lbs (kg)	Factory List Price
<b>(F) series</b>						
LF6-824	8'11" to 9'11"	8	9"	108-169 (80-125)	2060 (934)	\$ 16,700.00
LF6-1024	10'5" to 11'5"	10	9"	122-203 (90-150)	2260 (1025)	17,380.00
LF6-1224	11'11" to 12'11"	12	9"	135-236 (100-175)	2460 (1116)	18,520.00
<b>(J) series</b>						
LJ6-824	9'5" to 10'5"	8	10-1/2"	115-189 (85-140)	2160 (980)	16,865.00
LJ6-1024	11'1" to 12'1"	10	10-1/2"	135-216 (100-160)	2360 (1070)	17,665.00
LJ6-1224	12'9" to 13'9"	12	10-1/2"	155-243 (115-180)	2560 (1160)	18,800.00
<b>OPTIONAL EQUIPMENT</b>						
AD-01-0007	Feathering blade (set of 2) with scraper and back-up blade (Note: Feathering blade requires two drilled and tapped bumper washers #9579A)				Add 74.0 (34.0)	Add 726.00
	24"x1/4"(6mm) cutout blades in lieu of standard				Ded ea. 1.3 (0.6)	-0-
	26"x1/4"(6mm) plain blades in lieu of standard				Add ea. 5.8 (2.6)	Add ea. 26.00
	26"x1/4"(6mm) cutout blades in lieu of standard				Add ea. 3.8 (1.7)	Add ea. 26.00

### OTHER STANDARD FEATURES

Two parking stands.	Gangs easily reverse to tear down levees.
Adjustable cutting width.	Ductile cast iron bearing risers.
Follow the levee feature-gangs can shift independent from the tractor to follow true on sharply curving levees.	Our Levee Plows feature our exclusive Protect-O-Shield® bearing with a TWO year warranty.

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**  
 P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
 (800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# MANUAL LEVEE PLOW

## MODELS "MLF6" and "MLJ6"

9" or 10-1/2" Spacing  
(F) & (J) series



### STANDARD SPECIFICATIONS (Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" square, high carbon cold rolled steel	<b>MAIN FRAME:</b>	7" X 4" X 3/8" Tool bar with ASAE Cat. II and Cat. III hitch for quick coupler and conventional three point
<b>BLADES:</b>	24" x 1/4"(6mm) Plain with 10" backup blade behind outside blades,	<b>BEARINGS:</b>	Disc gangs feature maintenance-free bearings with three-year warranty; bearings eliminate possibility of contamination and need for re-lubrication
<b>SCRAPERS:</b>	Includes 3/16" x 6 1/2" x 8", high-carbon steel replaceable adjustable scraper blades mounted on bars of 2 1/2" x 2 1/2" square tubing. The scrapers are attached to the 2 1/2" x 1/2" thick arms with heavy-duty u-bolts.	<b>SPACING:</b>	9" on MLF6 10-1/2" on MLJ6
<b>GANG TILT:</b>	Manually controlled	<b>SPACER SPOOLS:</b>	Fabricated steel
<b>GANG ANGLE:</b>	18° to 28°	<b>TRANSPORT WIDTH:</b>	10'6" on 8-blade models 12'6" on 10-blade models
<b>WRENCH:</b>	One for gang bolts		
<b>FINISH:</b>	Powder coated		

Model No.	Adjustable Cutting	No. of Blade	Approximate Engine HP	Approximate Weight	Factory List
<i>(F) series</i>					
MLF6-824	8'11" to 9'11"	8	108-169 (80-125)	2060 (934)	\$ 15,757.00
MLF6-1024	10'5" to 11'5"	10	122-203 (90-150)	2260 (1025)	16,460.00
MLF6-1224	11'11" to 12'11"	12	137-238 (100-175)	2460 (1116)	17,625.00
<i>(J) series</i>					
MLJ6-824	9'5" to 10'5"	8	115-189 (85-140)	2160 (980)	15,990.00
MLJ6-1024	11'1" to 12'1"	10	135-216 (100-160)	2360 (1070)	16,700.00
MLJ6-1224	12'9" to 13'9"	12	155-243 (115-180)	2560 (1160)	17,860.00
<b>OPTIONAL EQUIPMENT</b>					
AD-01-0007	Feathering blade (set of 2) with scraper and back-up blade (Note: Feathering blade requires two drilled and tapped bumper washers #9579A)			Add 74.0 (34.0)	Add 726.00
	24"x1/4"(6mm) cutout blades in lieu of standard			Ded ea. 1.3 (0.6)	-0-
	26"x1/4"(6mm) plain blades in lieu of standard			Add ea. 5.8 (2.6)	Add ea. 26.00
	26"x1/4"(6mm) cutout blades in lieu of standard			Add ea. 3.8 (1.7)	Add ea. 26.00

### OTHER STANDARD FEATURES

Two parking stands.	Gangs easily reverse to tear down levees.
Adjustable cutting width.	Ductile cast iron bearing risers.
Follow the levee feature-gangs can shift independent from the tractor to follow true on sharply curving levees.	Our Levee Plows feature our exclusive Protect-O-Shield® bearing with a TWO year warranty.

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



### AMCO Manufacturing Company

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](http://www.facebook.com/AMCOManufacturingInc)



# AMCO ROTARY DITCHER



## STANDARD SPECIFICATIONS

<b>VERTICAL DITCHER:</b>	2 size heads to choose from 5 heat treated replaceable blades	<b>BUSTER SHANK:</b>	Standard on all AMCO Ditchers
<b>LEFT OFFSET DITCHER:</b>	2 size heads to choose from 5 heat treated replaceable blades	<b>IDLER SPROCKET:</b>	Adjustable idler sprocket to maintain drive chain tension.
<b>FINISH:</b>	Powder coated	<b>HITCH:</b>	Cat. II or III three point or quick coupler
<b>CHAIN CASE:</b>	6" x 10" structural tubing with double 80 riveted drive chain that runs in oil bath, Case hardened 16 tooth and 22 tooth drive sprockets.	<b>PARKING STAND:</b>	2
<b>BEARINGS:</b>	2 year warranty on bearings	<b>CUTTING BLADES:</b>	3/8" thick. Adjustable & Replaceable
		<b>SHIPPING:</b>	All AMCO Ditchers are shipped 100% assembled and palletized.
		<b>TRACTORS</b>	
		<b>HP RANGE:</b>	For 60 to 150 engine horsepower
		<b>SKID SHOE:</b>	Ratchet jack adjustable concave skid shoe to control depth of cut.

Model No.	Description	Approx Weight	Factory List Price
<b>Vertical Ditchers (Body Only)</b>			
AD-540-V	Vertical Rotary Ditcher for 540 PTO	569	\$ 5,295.00
AD-1000-V	Vertical Rotary Ditcher for 1000 PTO	569	5,295.00
<b>Offset Ditcher (Body Only)</b>			
AD-540-OS	Left Offset Rotary Ditcher for 540 PTO	734	\$ 7,640.00
AD-1000-OS	Left Offset Rotary Ditcher for 1000 PTO	734	7,640.00
<b>ORDER ONE FROM EACH OF THE FOLLOWING CATEGORIES</b>			
<b>Cutter Heads (New 5 Blades)</b>			
AD-CHA18	Cutter Head 18" - 20" 5 Blade	72	\$ 770.00
AD-CHA26	Cutter Head 24" - 26" 5 Blade	109	1,075.00
<b>PTO Driveline</b>			
AD-DL6S	1-3/8", 6 Spline 540 PTO	56	\$ 1,850.00
AD-DL21S	1-3/8", 21 Spline 1000 PTO	56	1,850.00
AD-DL20S	1-3/4", 20 Spline 1000 PTO	58	1,850.00



AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA

(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# DOMINATOR

## STANDARD SPECIFICATIONS

<b>CHAIN CASE:</b>	14" x 10" structural tubing with double 80 riveted drive chain that runs in oil bath, Case hardened 16 tooth and 22 tooth drive sprockets.	<b>BUSTER SHANK:</b>	Standard on all AMCO Ditchers
<b>FINISH:</b>	Powder coated	<b>IDLER SPROCKET:</b>	Adjustable idler sprocket to maintain drive chain tension.
<b>BEARINGS:</b>	2 year warranty on bearings	<b>SKID SHOE:</b>	Ratchet jack adjustable concave skid shoe to control depth of cut.
<b>CUTTER BLADES:</b>	5 heat treated replaceable blades	<b>PARKING STAND:</b>	Two
<b>BUSTER SHANK BRACKETS:</b>	2" X 3" Steel tubing	<b>HITCH:</b>	Cat. II or III three point or quick coupler
<b>CUTTER HEAD:</b>	Adjustable 24-26" (5-bladed head)	<b>TRACTOR HP RANGE:</b>	80-200 Engine Horsepower
		<b>ACCESS:</b>	Top and side of chain casing

Model No.	Description	Approx Weight (lbs)	Factory List Price
	Body		
AD-1000-D	Heavy-Duty Vertical Rotary Ditcher (1000 PTO only)	850	\$8,880.00
	*Includes AD-CHA26 Cutter Head and Buster Shank*		
	PTO Driveline		
AD-DL21S	1-3/8", 21 Spline 1000 PTO	56	\$1,850.00
AD-DL20S	1-3/4", 20 Spline 1000 PTO	58	\$1,850.00



**NEW! Dominator Vertical Ditcher -**  
The heavy-duty Dominator is a perfect fit for larger horsepower tractors.



NOTE: Hydraulic Dirt Shield is not offered at this time

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



### AMCO Manufacturing Company

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)





# AMCO's Exclusive Bedding Hippers

With Protect-O-Shield® Washers  
Featuring a 2-Year Bearing Warranty

## RIGID HEAVY DUTY - 1-1/2" SQUARE GANGS STANDARD SPECIFICATIONS (Metrics in Parentheses)

**GANGS:** 1-1/2" square axle with dual regreasable, triple lip sealed ball bearings with Protect-O-Shield® washers. One 18" x 1/4" plain blade and one 20" x 1/4" plain blade per gang . Three position angle adjustments. Grease fitting and wear guards standard equipment.

**FINISH:** Powder coated

**RIGID HITCH:** Heavy duty mast and yoke type.  
**2 Year Warranty On Bearings!** Fits Cat. II and III standard and quick coupler.  
**SHANKS:** Heavy duty high clearance fabricated shanks that allow either staggered or opposed gang setting.  
**1 PAIR DEPTH** For 7" x 7" tool bar, includes turnbuckle  
**GAUGE WHEELS:** adjustment and 15" x 6" wheels.

Model No.	Description	Transport Width	Approximate Engine HP Required (kW)	Approximate Weight (lbs)	Factory List Price
RBH6-1820	6-Row 7"x7"x3/8"x280" Tool Bar Fits row spacing of 36" to 40"	23'4"	135-182 (100-135)	2569	\$ 17,651.00
	DA-14-0032 Sweep Attachment				2,517.00
RBH8-1820	8-Row 7"x7"x1/2"x344" Tool Bar Fits row spacing of 36" to 42"	28'8"	176-243 (130-180)	3841	\$ 23,501.00
	DA-14-0033 Sweep Attachment				3,328.00
RBH6-1820	6-Row 7"x7"x1/2"x344" Tool Bar Fits row spacing of 38" to 40"	28'8"	135-182 (100-135)	3349	\$ 17,651.00
	DA-14-0032 Sweep Attachment				2,517.00
RBH8-1820	8-Row 7"x7"x3/8"x280" Tool Bar Fits row spacing of 30" to 32"	23'4"	176-243 (130-180)	3384	\$ 22,259.00
	DA-14-0033 Sweep Attachment				3,328.00

**FACTORY LIST PRICE DOES NOT INCLUDE ASSEMBLY**

OPTIONAL EQUIPMENT					
DA-02-2214	For 16" (7 Ga.) and 18" (1/4) Plain				
DA-02-2414	For 20" (1/4) and 22" (1/4) Plain				
DA-02-2714	For 20" (1/4) and 22" (1/4) Cutout				
DA-02-2814	For 22" (1/4) and 24" (1/4) Plain				
DA-02-2914	For 22" (1/4) and 24" (1/4) Cutout				

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**  
P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)  
[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# AMCO's Exclusive Bedding Hippers

With Protect-O-Shield® Washers  
Featuring a 2-Year Bearing Warranty

## HYDRAULIC HEAVY DUTY 1-1/2" SQUARE GANGS STANDARD SPECIFICATIONS

(Metrics in Parentheses)

**GANGS:** 1-1/2" square axle with dual regreasable, triple lip sealed ball bearings with Protect-O-Shield® washers. One 18" x 1/4" plain blade and one 20" x 1/4" plain blade per gang. Three position angle adjustments. Grease fitting and wear guards standard equipment.

**FINISH:** Powder coated

**RIGID HITCH:** Heavy duty mast and yoke type. Fits Cat. II and III standard and quick coupler.

**2 Year Warranty On Bearings!**  
**SHANKS:** Heavy duty high clearance fabricated shanks that allow either staggered or opposed gang setting.

**1 PAIR DEPTH GAUGE WHEELS:** For 7" x 7" tool bar, includes turnbuckle adjustment and 15" x 6" wheels.

Model No.	Description	Transport Width	Approximate Engine HP Required (KW)	Approximate Weight lbs	Factory List Price
FBH6-1820	6-Row 7"x7"x3/8"x264" Tool Bar Fits row spacing of 38" to 40"	16'0"	135-182 (100-135)	3557	\$ 27,953.00
	DA-14-0036 Sweep Attachment				
FBH8-1820	8-Row 7"x7"x1/2"x346" Tool Bar Fits row spacing of 36", 40" & 42"	20'0"	176-243 (130-180)	3896	33,647.00
	DA-14-0037 Sweep Attachment				

**FACTORY LIST PRICE DOES NOT INCLUDE ASSEMBLY**



Note: See page 28 for optional blades in lieu of standard

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# DUAL HD HYDRAULIC TOOL BARS

With Protect-O-Shield® Washers

Featuring a 2-Year Bearing Warranty

## HYDRAULIC HEAVY DUTY - 1-1/2" SQUARE GANGS

Model No.	Description	Transport Width/Height	Minimum Engine HP Required	Approx Weight LBS	Factory List Price
<b>3831-101</b>	31' 7"x7"x3/8" Folding Toolbar Fits row spacing of 30" for 12 row or row spacing of 30" to 36" for 10 row	16'8"	250	3000	\$ 19,795.00
<b>3841-101</b>	41' 7"x7"x3/8" Folding Toolbar Fits row spacing of 36" - 40" for 10 & 12 row	22'8"	275	3550	\$ 21,315.00

**2 PAIR OF GAUGE WHEEL ASSEMBLIES AND TIRES ARE INCLUDED IN THE FACTORY LIST PRICE FOR THE BELOW KITS**

### 10-ROW 1-1/2" HEAVY DUTY KITS

20	DA-02-2314	GANG ASSEMBLY 18" & 20" PLAIN BLADES		3173	\$ 27,677.00
5	DA-01-0154	WEAR GUARDS (2 ROW SET)	<b>2 Year Warranty</b>		
9	DA-01-0155	DUAL GANG FRAME	<b>On Bearings!</b>		
1	DA-01-0156	SHORT GANG FRAME			
1	DA-01-0157	LONG GANG FRAME			
1	DA-01-0115	BOX OF U-BOLTS & FASTENERS			
5	DA-01-0136	SCRAPERS (SET OF 4 FOR 2 ROWS)			
2	AL-20-0004	15" X 5", 5-HOLE WHEEL WITH 9.5L TIRE			

### 12-ROW 1-1/2" HEAVY DUTY KITS

24	DA-02-2314	GANG ASSEMBLY 18" & 20" PLAIN BLADES		3965	\$ 34,487.00
6	DA-01-0154	WEAR GUARDS (2 ROW SET)	<b>2 Year Warranty</b>		
11	DA-01-0155	DUAL GANG FRAME	<b>On Bearings!</b>		
1	DA-01-0156	SHORT GANG FRAME			
1	DA-01-0157	LONG GANG FRAME			
1	DA-01-0116	BOX OF U-BOLTS & FASTENERS			
6	DA-01-0136	SCRAPERS (SET OF 4 FOR 2 ROWS)			
4	AL-20-0004	15" X 5", 5-HOLE WHEEL WITH 9.5L TIRE			

### OPTIONAL BLADE SIZES

DA-02-2214	For 16" (7 Ga.) and 18" (1/4) Plain		
DA-02-2414	For 20" (1/4) and 22" (1/4) Plain		
DA-02-2714	For 20" (1/4) and 22" (1/4) Cutout		
DA-02-2814	For 22" (1/4) and 24" (1/4) Plain		
DA-02-2914	For 22" (1/4) and 24" (1/4) Cutout		

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA

(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# BEDDING HIPPER ASSEMBLIES

With Protect-O-Shield® Washers  
Featuring a 2-Year Bearing Warranty

Req'd	Part No.	<b>GAUGE WHEEL ASSEMBLIES AND TIRES ARE INCLUDED IN THE FACTORY LIST PRICE</b>	Total Weight lbs	Factory List Price
		Description		
		<b>8-ROW 1-1/2" HEAVY DUTY KITS</b>	2586	\$ 20,869.00
16	DA-02-2314	GANG ASSEMBLY 18"&20" PLAIN BLADES		
4	DA-01-0154	WEAR GUARDS (2-ROW SET) <b>2 Year Warranty</b>		
7	DA-01-0155	DUAL GANG FRAME <b>On Bearings!</b>		
1	DA-01-0156	SHORT GANG FRAME		
1	DA-01-0157	LONG GANG FRAME		
1	DA-01-0114	BOX OF U-BOLTS & FASTENERS		
4	DA-01-0136	SCRAPERS (SET OF 4 FOR 2 ROWS)		
		<b>10-ROW 1-1/2" HEAVY DUTY KITS</b>	3173	\$ 26,011.00
20	DA-02-2314	GANG ASSEMBLY 18"&20" PLAIN BLADES		
5	DA-01-0154	WEAR GUARDS (2-ROW SET) <b>2 Year Warranty</b>		
9	DA-01-0155	DUAL GANG FRAME <b>On Bearings!</b>		
1	DA-01-0156	SHORT GANG FRAME		
1	DA-01-0157	LONG GANG FRAME		
1	DA-01-0115	BOX OF U-BOLTS & FASTENERS		
5	DA-01-0136	SCRAPERS (SET OF 4 FOR 2 ROWS)		
		<b>12-ROW 1-1/2" HEAVY DUTY KITS</b>	3965	\$ 31,143.00
24	DA-02-2314	GANG ASSEMBLY 18"&20" PLAIN BLADES		
6	DA-01-0154	WEAR GUARDS (2-ROW SET) <b>2 Year Warranty</b>		
11	DA-01-0155	DUAL GANG FRAME <b>On Bearings!</b>		
1	DA-01-0156	SHORT GANG FRAME		
1	DA-01-0157	LONG GANG FRAME		
1	DA-01-0116	BOX OF U-BOLTS & FASTENERS		
6	DA-01-0136	SCRAPERS (SET OF 4 FOR 2 ROWS)		
		<b>16-ROW 1-1/2" HEAVY DUTY KITS</b>	5172	\$ 41,265.00
32	DA-02-2314	GANG ASSEMBLY 18"&20" PLAIN BLADES		
8	DA-01-0154	WEAR GUARDS (2-ROW SET) <b>2 Year Warranty</b>		
15	DA-01-0155	DUAL GANG FRAME <b>On Bearings!</b>		
1	DA-01-0156	SHORT GANG FRAME		
1	DA-01-0157	LONG GANG FRAME		
1	DA-01-0153	BOX OF U-BOLTS & FASTENERS		
8	DA-01-0136	SCRAPERS (SET OF 4 FOR 2 ROWS)		

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**  
P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)

# MISCELLANEOUS TOOL BAR AND HIPPER EQUIPMENT

With Protect-O-Shield® Washers  
Featuring a 2-Year Bearing Warranty

Part No.	Description	Total Weight lbs	Factory List Price
<b><u>A-FRAMES</u></b>			
DE-01-0020	Complete "A" Frame for use on 7"x7" tool bar	158	\$ 1,250.00
DA-01-0096	Complete "A" Frame (hydraulic) for use on 7"x7" tool bar	334	2,585.00
DE-01-0104	Complete "A" Frame for use on 4"x7" tool bar. Accepts Cat II or III three point hitch or quick coupler	150	1,315.00
<b><u>MISCELLANEOUS</u></b>			
DA-01-0136	Scrapers (Set of 4 for 2 rows)	14	180.00
DA-01-0154	Wear Guards (Set = 2 rows) (3/4")	11	78.00
<b><u>INDIVIDUAL HIGH CLEARANCE HIPPER SHANKS</u></b> (Gangs not included)			
DA-01-0155	Combination Long and Short Gang Frame (3/4")	86	620.00
DA-01-0156	Fabricated Short Gang Frame (3/4")	40	361.00
DA-01-0157	Fabricated Long Gang Frame (3/4")	71	432.00
	(Above Gang Frames for 4"x7" or 7"x7" Tool Bar) (U-Bolts and Fasteners must be ordered separately)		
DA-01-0110	Hold Down Kit for AMCO Hydraulic Hippers	42	315.00

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA

(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)

## BEDDING HIPPER

U-BOLTS AND WEAR GUARD BUNDLES  
OPTIONAL BLADE SIZES

**Mounting Hardware consists of U-Bolts & 7/8" Locknuts for 1-1/2" Axle - 7" x 7" Tool Bar\***

Part No.	Description	Factory List Price
DA-01-0139	For expanding 2-row	\$ 195.00
DA-01-0113	6-row Unit	579.00
DA-01-0114	8-row Unit	736.00
DA-01-0115	10-row Unit	888.00
DA-01-0116	12-row Unit	1030.00
DA-01-0111	Wear guards for expanding 2 rows	80.00
DA-01-0125	FWFP (includes (1) L.H. & (1) R.H. Wear Guard, U-Bolts & Fasteners)	185.00

### OPTIONAL BLADE SIZES

DA-02-2214	For 16" (7 Ga.) and 18" (1/4) Plain		
DA-02-2414	For 20" (1/4) and 22" (1/4) Plain		
DA-02-2714	For 20" (1/4) and 22" (1/4) Cutout		
DA-02-2814	For 22" (1/4) and 24" (1/4) Plain		
DA-02-2914	For 22" (1/4) and 24" (1/4) Cutout		

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA

(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# Z-BLADE

## MODEL "Z" STANDARD SPECIFICATIONS

<b>BLADES:</b>	1/2" X 6" high carbon, heat-treated blades are reversible and replaceable	<b>FINISH:</b>	Powder-coated
<b>HITCH:</b>	Fits category II or III hitches. Is quick-hitch compatible	<b>DEPTH ADJUSTMENT:</b>	Tall side panel with manual depth adjustment
<b>SKID PLATES:</b>	3" wide x 3/8" thick; replaceable	<b>MAIN FRAME:</b>	4" x 4" x 3/8" square tubing

Model No.	Working Width	Max Engine Horsepower	Approximate Weight (lbs)	Factory List Price
Z8	8'	90	1025	\$ 3,830.00
Z10	10'	100	1195	4,390.00
Z12	12'	110	1460	5,532.00
Z14	14'	120	1630	5,710.00



MANUFACTURING, INC.

Yazoo City, MS | 800-748-9022

# Z-BLADE



- > Available in 8', 10', 12', and 14' working widths
- > Features dual-edged, replaceable cutting blades
- > Standard 3-point hitch fits category II or III hitches and is quick-hitch compatible
- > Tall side panels with depth adjustment; replaceable skid plates

## A versatile grader blade for road maintenance and ag operations.

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



### AMCO Manufacturing Company

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA

(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)



# AMCO's Water Furrow Plow

With Protect-O-Shield® Washers  
Featuring a 2-Year Bearing Warranty

## RIGID HEAVY DUTY 1-1/2" SQUARE GANGS STANDARD SPECIFICATIONS (Metrics in Parentheses)

<b>AXLES:</b> 1-1/2" Square	<b>BEARINGS:</b> 1-1/2" Sq. Bore Regreasable <b>2 Year Warranty On Bearings!</b>
<b>BLADES:</b> 22" x 1/4" Plain	<b>TOOL BAR AND HITCH:</b> A-Frame accepts Cat. II or III Three Point Hitch or Quick Coupler Mounted on a 7" x 4" x 1/4" bar
<b>SHANKS:</b> (2) Fabricated Short Gang Frame	<b>FINISH:</b> Powder coated
<b>Parking Stand:</b> Two	

Model No.	Description	No. of Discs	Disc Size and Type	Engine HP (kW)	Approximate Weight	Factory List
WFP110	2 gang frames on a 7" x 4" 1/4" bar 110" long	2	22" Plain x 1/4"	41-81 (30-60)	626	\$ 4,770.00
WFP180	2 gange frames on a 7" x 4" 1/4" bar 180" long	2	22" Plain x 1/4"	41-81 (30-60)	730	\$ 6,090.00
<b>OPTIONAL EQUIPMENT</b>						
For 24" Plain Blades, 1-1/2" sq. Axle, Add per unit						Add 35.00



AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**  
P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)






# AMCO's Border Plow

With Protect-O-Shield® Washers  
Featuring a 2-Year Bearing Warranty

## RIGID HEAVY DUTY 1-1/2" SQUARE GANGS STANDARD SPECIFICATIONS (Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" Square, high carbon cold rolled steel	<b>BEARINGS:</b>	Protect-O-Shield®, heavy duty 1-1/2" square bore regreasable triple ball type toggle mounted, with zerk guards & wear guards
<b>BLADES:</b>	26" x 5/16" Cutout blade on inside with 24" x 1/4" & 22" x 1/4" diminishing blades	<b>2 Year Warranty On Bearings!</b>	
<b>SPACING:</b>	9 inches (229mm) Fabricated steel spacer spools	<b>HITCH:</b>	A-Frame accepts Cat. II or III Three Point Hitch or Quick Coupler Mounted on a 4" x 7" x 1/4" bar
<b>SHANKS:</b>	Heavy duty high clearance fabricated shanks (straight)	<b>PARKING STAND:</b>	Two
<b>GANG</b>		<b>MAIN FRAME:</b>	4" x 7" x 1/4" dual bars 81" long
<b>ANGLE:</b>	Adjustable gangs - three position angle adjustment		
<b>FINISH:</b>	Powder Coated		

Model No.	Description	No. of Discs	Disc Size and Type	Engine HP (kW)	Approximate Weight	Factory List
BP-6	2 gang frames on a 4" x 7" 1/4" dual bars 81" long	6	diminishing 26", 24", 22"	41-81 (30-60)	721	7,915.00

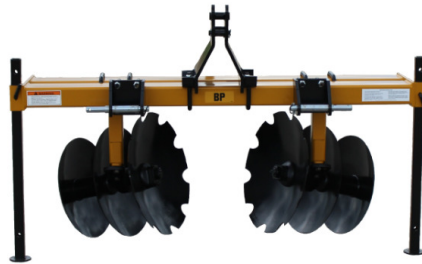

AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



**AMCO Manufacturing Company**  
P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)  
[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)

# AMCO's Pivot/Tile Plow

With Protect-O-Shield® Washers  
Featuring a 2-Year Bearing Warranty



## RIGID HEAVY DUTY 1-1/2" SQUARE GANGS STANDARD SPECIFICATIONS (Metrics in Parentheses)

<b>AXLES:</b>	1-1/2" Square, high carbon cold rolled steel	<b>BEARINGS:</b>	Protect-O-Shield®, heavy duty 1-1/2" square bore regreasable triple ball type toggle
<b>BLADES:</b>	24" x 1/4" (6mm) Cutout blade on inside & two 24" x 1/4" Plain blades on outside	<b>2 Year Warranty On Bearings!</b>	mounted, with zerk guards & wear guards
<b>SPACING:</b>	9 inches (229mm) Fabricated steel spacer spools	<b>HITCH:</b>	A-Frame accepts Cat. II or III Three Point Hitch or Quick Coupler
<b>SHANKS:</b>	Heavy duty high clearance fabricated shanks (angled)	<b>PARKING STAND:</b>	Two
<b>GANG</b>		<b>MAIN FRAME:</b>	4" x 7" x 1/4" dual bars 81" long
<b>ANGLE:</b>	Adjustable gangs – three position angle adjustment		
<b>FINISH:</b>	Powder Coated		

Model No.	Description	No. of Discs	Disc Size and Type	Engine HP (kW)	Approximate Weight	Factory List
PTP-624	2 gang frames on a 4" x 7" 1/4" dual bars 81" long	6	24" x 1/4"	41-81 (30-60)	721	7,915.00



AMCO PL Effective January 1, 2025

F.O.B. Yazoo City, Mississippi

**SPECIFICATIONS AND PRICES SUBJECT TO CHANGE WITHOUT NOTICE**



### AMCO Manufacturing Company

P. O. Box 1107, 800 South Industrial Parkway, Yazoo City, MS 39194 USA  
(800)748-9022 (662)746-4464 Fax (662)746-6825

[www.amcomfg.com](http://www.amcomfg.com)

[www.facebook.com/AMCOManufacturingInc](https://www.facebook.com/AMCOManufacturingInc)